Modular Ice Machine 320 kg

MF 46

Modular Ice Machine 320 kg



Item #:
Project:
Quantity:



FEATURES

- Hermetic compressor. Stainless steel auger and freezing cylinder (evaporator). Equipped with an electronic control board.
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings. Double protection electronic rotation sensor and drive coupling - on gear motor and gear reducer.
- Low-water sensor protection on refrigeration and gear motor system. Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- PS plastic top cover.
- Reduced height to ease installation.

		CONDENSING	RECOMMENDED BINS				
		SYSTEM	Head	Bins		kg	
		Air cooled	MF 46	CBT22EFCD	SB193	129	
		REFRIGERANT GAS R404A R452A		CBT22EFCD	SB322	168	
				CBT30EFSD	SB393	181	
				CBT30EFSD	SB530	243	
				CBT42EFSD	SB550	252	
	MF 46			CBT48FMCD	SB948	406	
	Superflake ice Residual water content15%			CBT52FMCD	SB1025	478	
				•	UBH1100	553	
		VOLTAGE		•	SIS300	137 + 73	
		V/Hz/ph		•	SIS700	318 + 73	
		230/50/1 230/60/1	: Ice chute of	mbination betwo cut-out performe c: need addition	ed upon installa	and bin ation	



Minimum 10 Air temperature Water temperature 1 bar (14 psi)

OPERATING REQUIREMENTS

-10

ORTANT NOTICE:

els and specifications are subject ge without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store

Water pressure

Electrical voltage

www.scotsman-ice.it www.scotsman-ice.com

Maximum

43

5 bar (70 psi)


+10

MF 46

Scotsman® Ice Systems

Modular Ice Machine 320 kg

Item #:
Project:
Quantity:

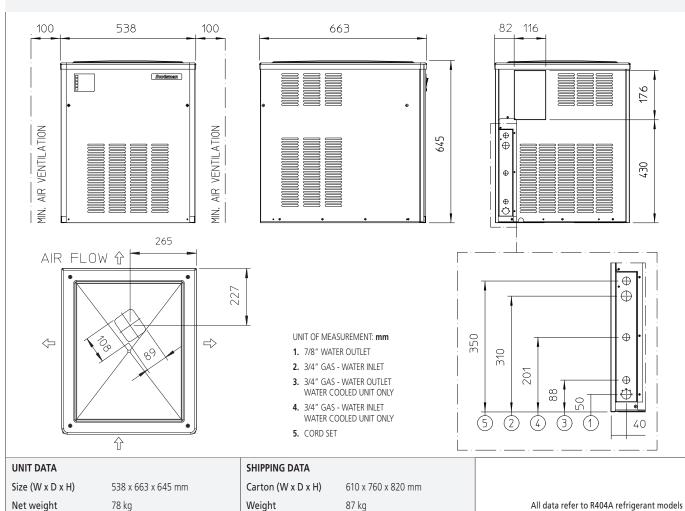

3		5		3	5						
		24 h ice production kg °C Amb. / °C Water		Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version		10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/ .	1.0			No. x Ømm²	А
	Voltage	kg	kg	kg	100 kg 24h	24h	. I/h	W	W		
MF 46 AS	230/50/1	320	305	240	10.8	26.0	10.0	1200	2650	3 x 1.5	16
MF 46 WS	230/50/1	330	325	290	9.0	26.0	104.2	1200	2650	3 x 1.5	16
MF 46 AS	230/60/1	320	305	240	10.8	26.0	10.0	1200	2650	3 x 1.5	16
MF 46 WS	230/60/1	330	325	290	9.0	26.0	104.2	1200	2650	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions