MF 26

Scotsman® Ice Systems

Modular Ice Machine up to 140 kg

Item #:
Project:
Quantity:



FEATURES

- Produces Flake Ice, extruded at a temperature just below 0°C, with25% residual water content, hence very rich in moisture.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.

CONDENSING **RECOMMENDED BINS SYSTEM** Head **Bins** kg **SB193** 129 Air cooled Water cooled SB322 168 CBT30EFSD SB393 181 MF 26 CBT30EFSD SB530 243 **REFRIGERANT** MF 26 **GAS** CBT42EFSD SB550 252 CBT48FMCD 406 SB948 Residual water content 25% R134a **SIS300** 137 + 73**VOLTAGE** V/Hz/ph 115/60/1 **LEGEND:** 230/50/1 ✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation 230/60/1

tifications:







OPERATING REQUIREMENTS

CBTxxxxxxxxxx : need additional bin top

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

ORTANT NOTICE:

Models and specifications are subject to change without notice.

This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**Apple store
Google play
Windows store


www.scotsman-ice.it www.scotsman-ice.com

MF 26

Scotsman[®]

Modular Ice Machine up to 140 kg

Item #: Project: Quantity:

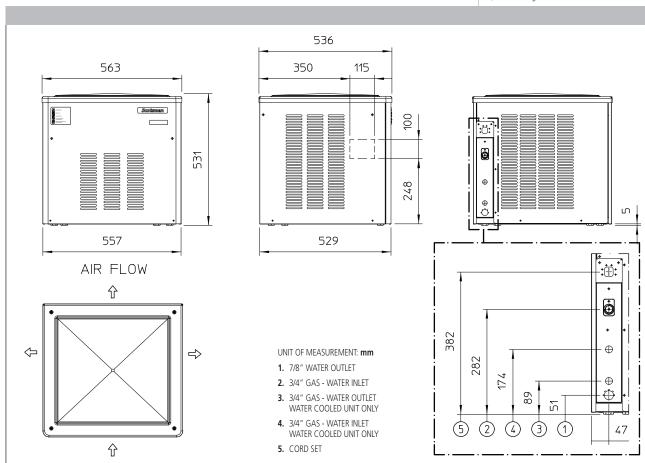

UNIT DATA

Size (W x D x H) 563 x 536 x 531 mm

Net weight 45 kg

SHIPPING DATA

Carton (W x D x H) 630 x 610 x 680 mm

Weight 52 kg

		Compressor		Circuit wires		Max. fuse size	
Version	Voltage	Btu/h	W	No.	Ømm²	Α	
MF 26 AS	230/50/1	4436	1300	3	1.5	10	
MF 26 AS	115/60/1	4777	1400	3	1.5	10	
MF 26 AS	230/60/1	4436	1300	3	1.5	10	
MF 26 AS	230/60/1	4436	1300	3	1.5	10	
MF 26 WS	230/50/1	4436	1300	3	1.5	10	

			24 h ice production kg		Energy		Water usage*	Instant	
			°C Amb. / °C Water		consumption*		water usage	power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
MF 26 AS	Air	230/50/1	120	114	95	11.4	10.8	4.6	500
MF 26 AS	Air	115/60/1	140	135	109	12.6	13.7	4.8	650
MF 26 AS	Air	230/60/1	120	114	95	11.4	10.8	4.6	500
MF 26 AS	Air	230/60/1	120	114	95	11.4	10.8	4.6	500
MF 26 WS	Water	230/50/1	120	114	95	10.0	9.5	29.0	400

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions