

# KERN ABT 220-4NM

The premium model with single-cell weighing system

# KERN



## Category

Brand	KERN
Product category	Laboratory balance
Product group	Analytical balance
Product family	ABT

## Measuring System

Weighing system	Single-Cell
Weighing capacity [Max]	220 g
Units (if device is conformity assessed)	g ct
Readability [d]	0,0001 g
Resolution	2.200.000
Linearity	± 0,0002 g
Reproducibility	0,0001 g
Tare range	220 g
Units	g ct
Minimum weight [Min]	0,01 g
Automatic adjustment - Standard temperature deviation	0,5 °C

Adjustment options	Adjusting with external weight
	Internal calibration (automatic)
	Adjusting with internal weight (manual)

Stabilization time	4 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,0003 g
USP Minimum weight of sample (k = 2, U = 0.1%)	200 mg

Automatic adjustment - Standard time interval	4 h
Default unit	g
Readability carat [d] (ct)	0,001 ct
Weighing capacity [Max] (ct)	1100 ct
Conformity assessment possible	✓
Construction type of the scale	Single-range balance

## Approval

CE mark	✓
Conformity assessment possible ex works	✓
Accuracy classe	I
Verification scale interval [e]	0,001 g
Verification scale interval [e] (ct)	0,01 ct

## Display

Display type	LCD
Display digit height	14 mm

## Construction

Dimension housing (W×D×H)	217×345×330 mm
Dimensions rectangular draught shield - inner (W×D×H)	168×172×223 mm
Dimensions rectangular draught shield - outer (W×D×H)	200×240×260 mm
Material display housing	Plastics
Material housing	metal
Material weighing plate	stainless steel
Material draught shield	glass
Dimensions weighing surface (Ø)	80 mm
Levelling feet adjustable	✓
Level indicator	✓

## Functions

Sum memory function	✓
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Underfloor weighing	Hook (included in delivery)
Function for averaging under unstable weighing conditions	✓
Capacity - Display	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	220.000

# KERN ABT 220-4NM

**KERN**

The premium model with single-cell weighing system

Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	1 mg
Smallest piece weight when piece counting - normal conditions	10 mg
Reference quantity	10, 20, 50, 100
Tare function	manual (multi)
Number of keys for operation	6

## Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	AUS
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	AUS
	UK
	US
	CH
Input voltage power supply / power [Max]	220 V - 240 V AC, 50 Hz
Input voltage device / power [Max]	12 V DC, 1000 mA

## Environmental conditions

Ambient temperature [Min]	10 °C
Ambient temperature [Max]	30 °C
Humidity of environment [Max]	80 %
Storage temperature [Min]	-10 °C
Storage temperature [Max]	50 °C

## Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	400×585×545 mm
Net weight	7,65 kg
Shipping method	Parcel service
Net weight approx.	8 kg
Gross weight approx.	12 kg
Shipping weight	25,5 kg

## Services (optional)

Article number for conformity assessment	965-201
Article number for DAkkS calibration	963-101


Article number for certificate of conformity (verification)	969-517
---	---------

## Interface

Interfaces	RS-232 standard
------------	-----------------

## Pictograms

### STANDARD

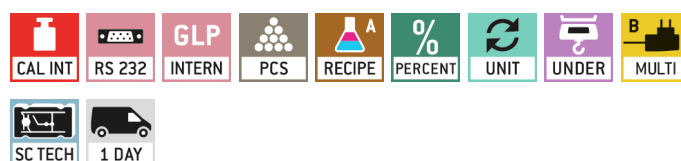

### OPTION



### FACTORY

